



# COMBiLiFT



Customised Handling Solutions

## C3000 GT

*making short work of long loads*



*The C6000 GT can operate outdoor on semi-rough terrain as well as indoors.*

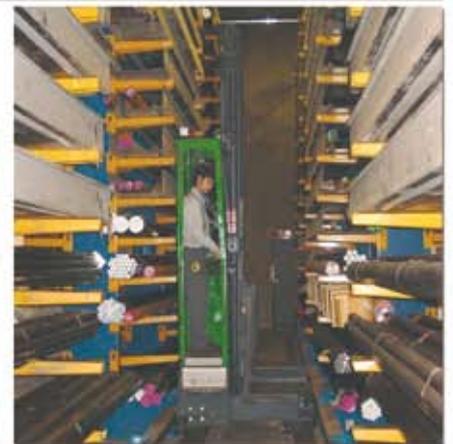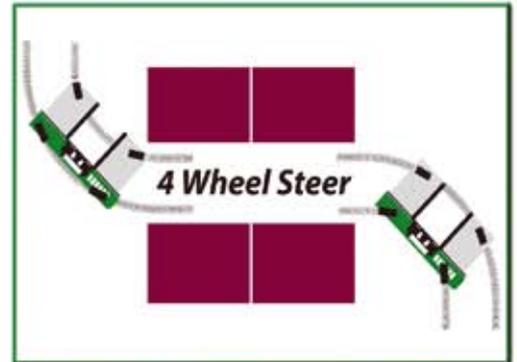

*indoor outdoor narrow aisle solutions*

[www.COMBiLiFT.COM](http://www.COMBiLiFT.COM)



# SPECIFICATIONS




## Model C3000 GT

REF	DESCRIPTION	1220mm
1a	Lift Height	4530mm
1b	Free Lift Height	1750mm
2	Height Mast Closed	310mm
3	Max.(Mast raised)	5880mm
4	Overall Length	1880mm
5	Mast Travel	1270mm
6	Ground Clearance Under Mast	125mm
7	Ground Clearance to Centre of Wheelbase	125mm
8	Height Over Cab (without work-lights)	2900mm
9	Width Across Platforms	2946mm
10	Outside Spread of Fork Arms	1350mm
11	Wheelbase	2300mm
12	Frame Opening	1400mm
13	Load Centre Distance	600mm
14	Overhang Front	150mm
15	Track	1580mm
16	Overhang Back	150mm
17	Length From Face of Fork	660mm
18	Forward Fork Tilt	3°
19	Backward Fork Tilt	4½°
20	Platform Height With Front Lowered	420mm
21	Platform Length	1220mm
A	Capacity	3000kg
B	Unladen Weight	9000kg
C	Maximum Ground Speed	12Km/H
D	Gradability	10%
E	3 Ltr GM LPG	48.5 kW (65 hp)
F	Electric's	12 Volt
G	Fork Section	50 x 125 x 1220mm
H	350/150-280 Front Tyre (Solid) x 2	350 / 150
I	23 x 10-12 Rear Tyre (Super Elastic) x2	OD 585mm/250mm
J	Standard Colour	Green / Grey

### FEATURES INCLUDE:

- Rubber Mounted Overhead Guard
- Load Sensing Steering
- Tilting Chassis +/- 1/2" At Front
- 4 Wheel Steering
- 2 Wheel Hydrostatic Drive
- Hydraulic Oil Cooler

### Distributed By

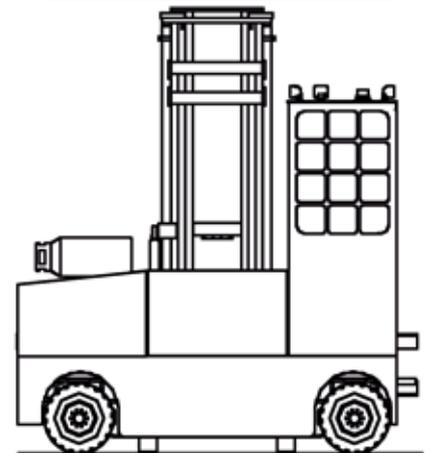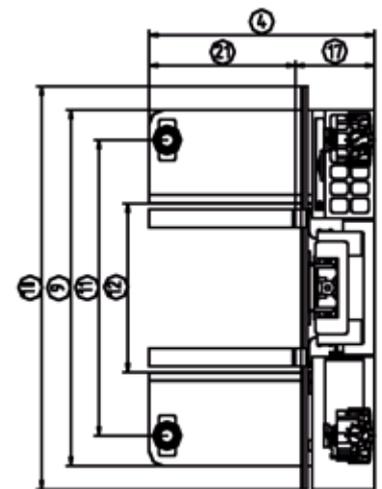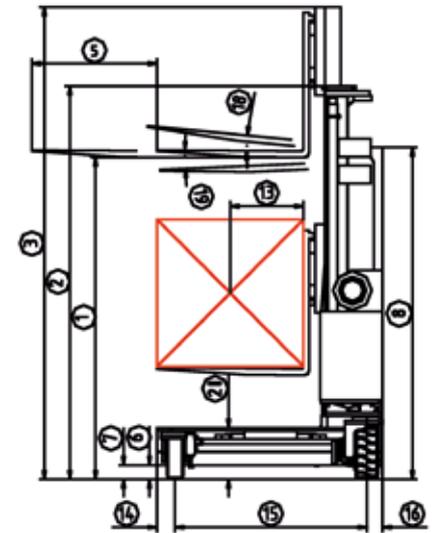

**COMBiLiFT Ltd**  
 Co.Monaghan  
 Ireland  
**Tel:** ++ 353 47 80500  
**Fax:** ++ 353 47 80501  
**info@combilift.com**

[www.COMBiLiFT.COM](http://www.COMBiLiFT.COM)